


PAL16H8

(Series 20)

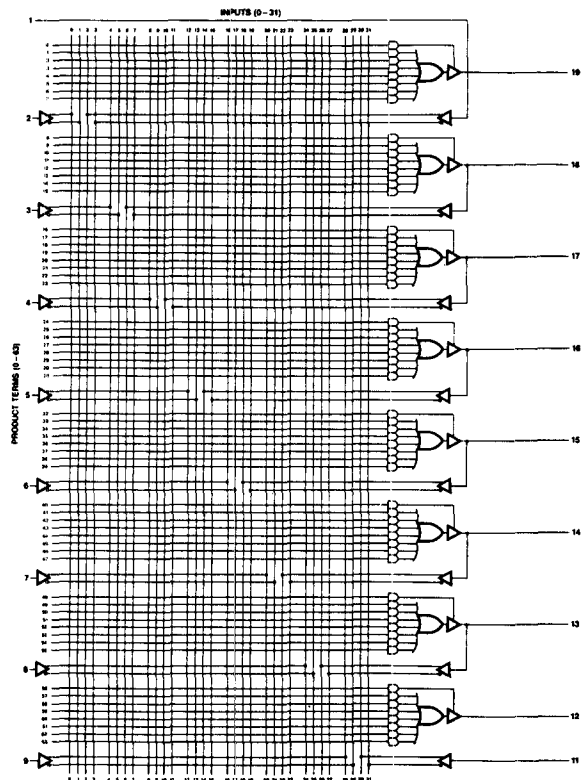

項目	入力	出力	max min	STD	A	A2	A4	B	B2	C	単位
t_{pd}	Input or Feedback	output	max	35	25						ns
		X	max	35	25						ns
	Enable	Z	max	35	25						ns
t_h	—	—	min	0	0						ns
t_{su}	Input or Feedback	—	min	30	20						ns
t_w	Clock	—	min	25	15						ns
f_{max}	—	—	max	18	28.5						MHz
I_i	Input	L →	max	0.25	0.25						mA
		H →	max	0.025	0.025						mA
I_{cc}	$V_{cc} = \text{Max}$		max	180	180						mA

V_{cc} : Pin 20

GND : Pin 10

社名	記号	STD	A	A2	A4	B	B2	C
FC								
富士通								
日立								
松下								
三菱								
MOT								
NS	PAL							
日電								
RAY								
RCA								
SIG								
TI								
東芝								
SGS								
沖								
AMD	AMPAL	*	*					
CYPRESS	CYPAL							
HARRIS	HPL							
LATTICE	RAL							
MMI	PAL							
リコー								